

GOLdeye®

Your last stop for CCTV solution



Speedome Camera

GEG65SB36 - High Resolution 470 TVL


- 1/4" SONY CCD
- Minimum Illumination : 0.01 Lux Monochrome
 - Original Sony Zoom Module
 - Auto Iris Auto Focus, BLC
 - 360° continuous rotation, Auto Flip
- Various zoom module : 18X Color, 26X Day&Night, 36X Day&Night
 - IR Sensing in BW mode (26X & 36X only)
 - IP66 for G65 - W series
- Build-in Heater & Blower & Sunshield
 - 128 preset positions
 - 4 preset tour, pattern tour
- Auto pan between 2 preset positions
 - 4 alarm input, 1 relay output



Korean component, Malaysian technology

CE FC

Your last stop for CCTV solution

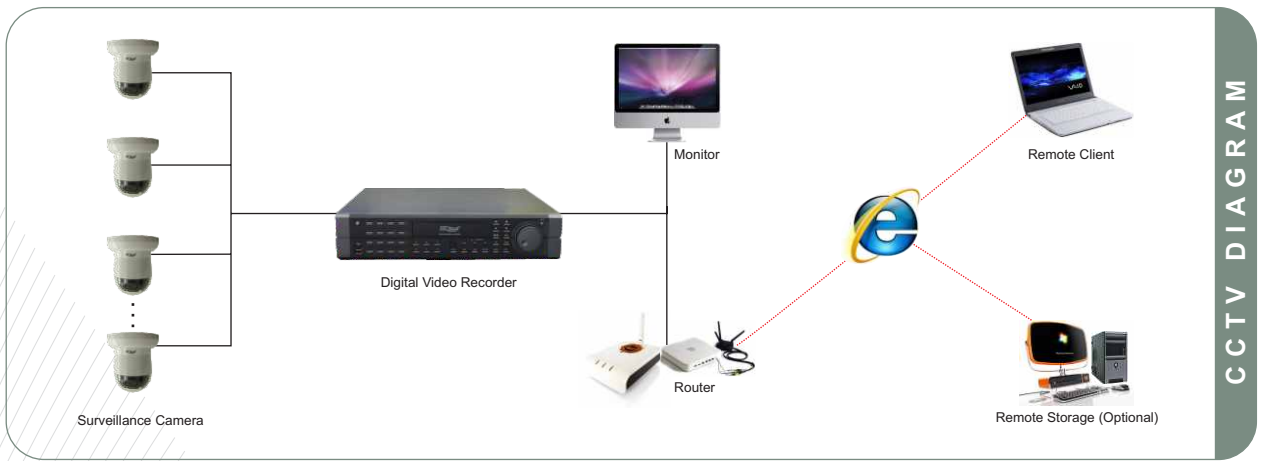

CCTV DIAGRAM

SPECIFICATIONS

Model	GEG65SB36
Image Sensor	1/4" SONY CCD
Active Pixel (h xv)	752 x 582
Synchronization	Internal
White Balance	Auto / Manual
Horizontal Resolution	470 TV Lines
Minimum Illumination	0.01 Lux Monochrome
S/N Ratio	>50dB
Electronic Shuttle	1/3 ~10,000s
Zoom Magnification	36x Optical, 10x Digital
zoom Lens	3.4 - 122.4mm
Video Output	1Vp-p Video Composite
Presets	120
Pan Speed	0.5°~ 300°/s
Tilt Speed	0.5°~ 150°/s
Pan Range	360° Continuously
Tilt Range	180° With Auto Flip
Address	254
Communication	RS485
Protocol	Pelco-D.Pelco-P, Adjustable Baud-rate
Power Supply	24VAC
Power Consumption	Indoor (G65-S) Max .1.2A; Outdoor (G65-W) Max .2.5A
Operating Temperature	Indoor (G65-S) -10° ~ +40°C; Outdoor (G65-W) -35°C ~ +50°C
Relative Humidity	90% Without Condensation
Dimension & Weight	Indoor (G65-S) 133 x 222mm, 2.0Kg; Outdoor (G65-W) 200 x 320mm, 5.0Kg

Authorized Distributor:

GOLDEYE®

w w w . g o l d e y e c c t v . c o m