

H.264 Digital Video Recorder



- GEH6104 - 4ch 100/100fps DVR + 2HDDs**
- GEH6108 - 8ch 200/100fps DVR + 2HDDs**
- GEH6116L - 16ch 400/200fps DVR + 2HDDs**
- GEH6116 - 16ch 400/400fps DVR + 2HDDs**


- New H.264 Video Compression
- Real-Time Display for all channel
- Dual Main Monitor output : VGA & Composite
- DVR upgrade & backup through USB flash disk USB Mouse & Remote control, RS485 PTZ control

Made in Korea



Your last stop for CCTV solution

APPLICATION

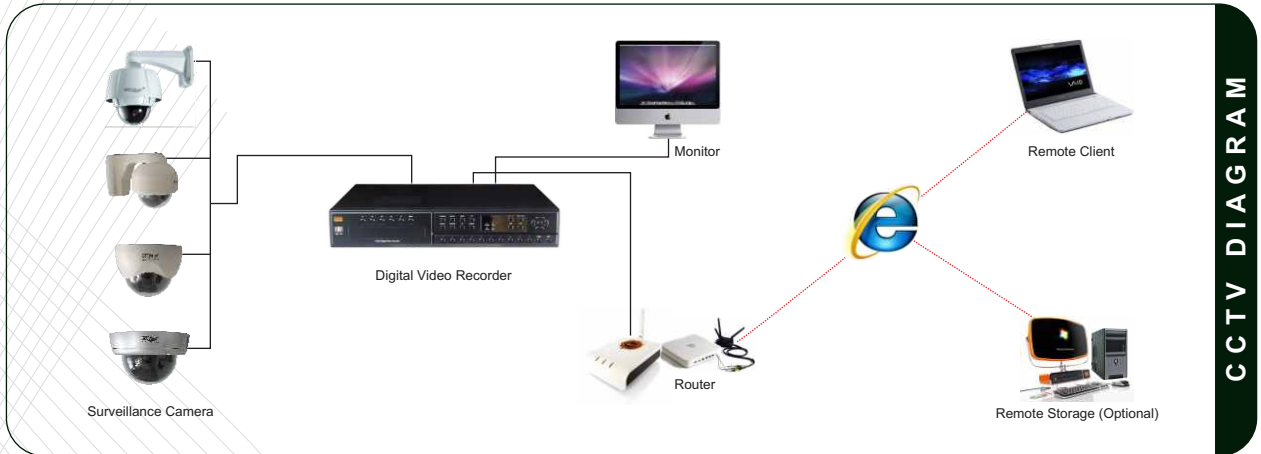

CCTV DIAGRAM

SPECIFICATIONS

Model		GEH6104	GEH6108	GEH6116L	GEH6116
Video Inputs / Outputs	Signal Format	NTSC or PAL (Auto-Detection)			
	Video Input	Composite : 4 BNC	Composite : 8 BNC	Composite : 16 BNC	
	Monitor Outputs	1 Composite, 1 VGA, 1 Spot			1 Composite, 1 VGA, 4 Spot
	VGA Output	1			
	Resolution	720 X 480 (NTSC), 720 X 576 (PAL)			
Audio Inputs / Outputs	Audio Input	4 RCA (Line in)			16 RCA (4 Mic In, 12 Line in - Option)
	Audio Output	1RCA (Line out)			
Auxiliary input / output	RS485 - 1EA	1EA, for POS, Access Control. PTZ integration, Key Board Control			
	USB Port	USB 2.0 x1, USB 1.1 (Mouse) x1	USB 2.0 - 3EA, USB 1.1 (USB mouse) - 1EA		
Alarm handling	Alarm Input	4 TTL	8 TTL	16 TTL	
	Alarm Output	2 Relay + 2 TTL			4 Relay + 12 TTL
Monitor Viewing	Spilt Screen	1, 4, PIP, Digital Zoom	1, 4, 9, PIP, Digital Zoom	1, 4, 9, 13, 16, PIP, Digital Zoom	
	Video Compression	H.264			
Recording	Speed @ Resolution (NTSC / PAL)	120fps / 100fps @CIF		240fps / 200fps @CIF	480fps / 400fps @CIF
		60fps / 50fps @H-D1		120fps / 100fps @H-D1	240fps / 200fps @H-D1
		30fps / 25fps @D1		60fps / 50fps @D1	120fps / 100fps @D1
Storage	ODD	None			
	Primary Storage	2 SATA HDDs			
	Max. Capacity per HDD	2TB			
User Interfaces	Network Time Protocol	Yes			
	Dimensions (W x H x D)	370 x 67 x 390 (mm)			
	Operating Temperature	5°C ~ 40°C			
	Security	Power	12V DC, 3.33A, 40W		

Authorized Distributor:

