

H.264 Digital Video Recorder




GEH5804 - 4ch 100/100fps DVR + 8HDDs
GEH5808 - 8ch 200/200fps DVR + 10HDDs
GEH5816 - 16ch 400/400fps DVR + 10HDDs

- New H.264 Video Compression
- Professional 4/8/16CH real time D1 recording. Premier image quality and performance.
- Resolution/frame rate/image quality adjustable per channel
- Full channel simultaneously playback with audio @D1 real time
- VGA 1280*1024, HDMI 1080p video out
- Programmable display/spot out/alarm mode
- Advanced recording program
- Privacy mask/digital zoom/snapshot
- Digital watermark
- Strong log function supported
- Powerful remote configuration and maintenance function
- Redundant recording
- Features for large scale installations
- Perfect support of iPhone, Blackberry, Google phone, Symbian and Windows mobile
- External storage via E-SATA
- Express backup
- Professional CMS and clients software



Korean component, Malaysian technology

Your last stop for CCTV solution

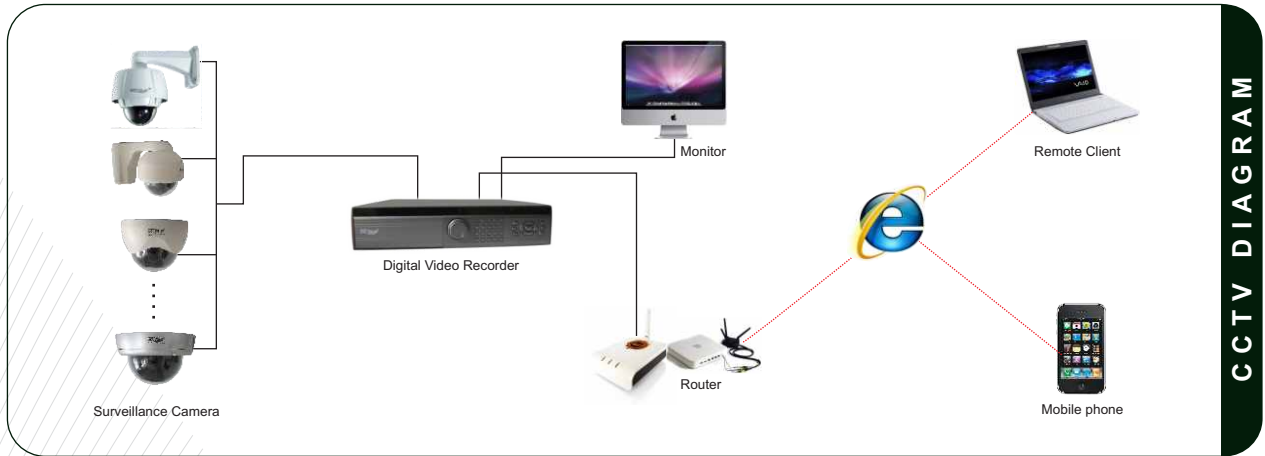

CCTV DIAGRAM

SPECIFICATIONS

Model		GEH5804	GEH5808	GEH58016
Video	Input	Composit: 1.0Vp-75Ω, BNC×4	Composit: 1.0Vp-p/75Ω, BNC×8	Composit: 1.0Vp-p/75Ω, BNC×16
	Output	Composit: 1.0Vp-p/75Ω, BNC×2; High Resolution VGA: 1280×1024 HMDI: 1080P(1920×1080); Loop output: 1.0Vp-p/75Ω, BNC×4	Composit: 1.0Vp-p/75Ω, BNC×2; High Resolution VGA: 1280×1024 HMDI: 1080P(1920×1080); Loop output: 1.0Vp-p/75Ω, BNC×8	Composit: 1.0Vp-p/75Ω, BNC×2; High Resolution VGA: 1280×1024 HMDI: 1080P(1920×1080); Loop output: 1.0Vp-p/75Ω, BNC×16
Record Resolution		352×288/704×576 (PAL) ; 352×240/704×480 (NTSC)		
Frame Rate (@ D1 resolution)	Display	100fps(PAL), 120fps(NTSC)	200fps(PAL), 240fps(NTSC)	400fps(PAL), 480fps(NTSC)
	Record	100fps(PAL), 120fps(NTSC)	200fps(PAL), 240fps(NTSC)	400fps(PAL), 480fps(NTSC)
	Playback	100fps(PAL), 120fps(NTSC)	200fps(PAL), 240fps(NTSC)	400fps(PAL), 480fps(NTSC)
Audio	Input	RCA×4	RCA×8	RCA×16
	Output	RCA×1		
	MIC	RCA×1		
Alarm	Input	4CH	8CH	16CH
	Output	4CH		
Recording Mode		Manual, time, motion, sensor		
Pentaplex		Preview, record, playback, backup, remote access		
Network Interface		RJ45 10M/100M/1000M Ethernet Adjustable		
PTZ		YES 128presets, 32 cruises		
IR controller		YES		
Communication Interface		RS485 x 2, USB2.0 x 2		
HDD		SATA x 8	Local: SATA x 8, E-SATA x 2 (up to 10 SATA HDD)	
Power Supply		110 - 230V		
Dimension		W430 x D450 x H90mm		

Authorized Distributor:

