

# GOLdeye®

Your last stop for CCTV solution

# ZOOM Camera



**GEZ141 - Resolution 480 TVL - Min. Illumination: 0.1Lux(F/1.6)**


**GEZ141X - Resolution 480 TVL - Min. Illumination: 0.01Lux(F/1.6)**

- High Magnification Zoom (Optical 22X, Digital 12X)
- Powerful & level selectable BLC
- OSD
- RS-485 interface (PELCO-D&P support)
- D&N function W/Built-in Day&Night lens
- Auto focus / Auto Iris



Made in Korea

CE FC

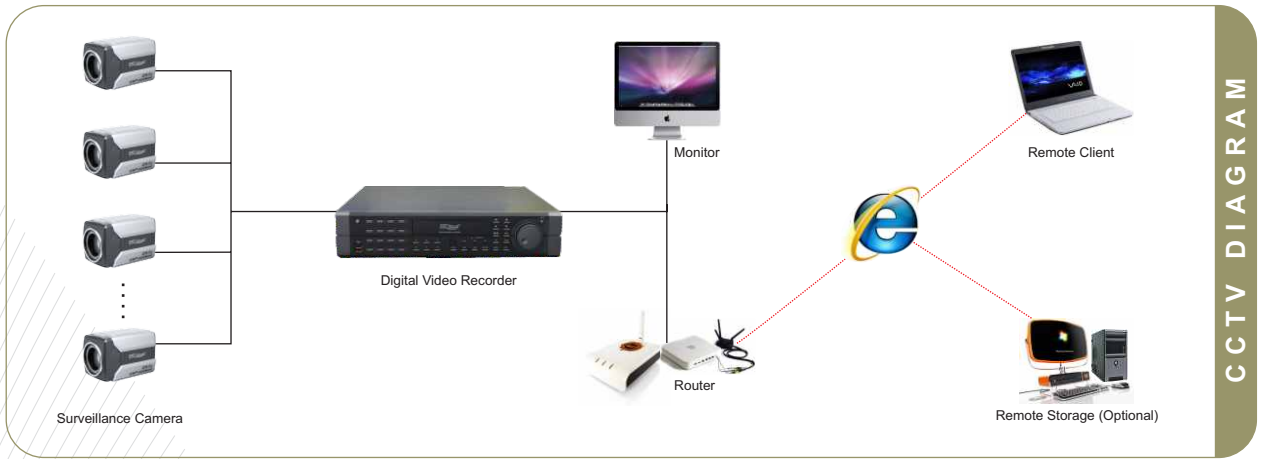

**SPECIFICATIONS**

Model	GEZ141	GEZ141X
<b>CCD TYPE</b>	1/4" COLOR SONY SUPER HAD CCD	1/4" COLOR SONY EXview HAD CCD
<b>Pixel</b>	410K	
<b>Scanning</b>	2:1 Interlace	
<b>Sync. Type</b>	Internal	
<b>Resolution</b>	480TV-LINE	
<b>Video output</b>	1.0Vp-p Composite	
<b>S/N Ratio</b>	50dB or More (AGC OFF)	
<b>Min.Illumination</b>	0.1 Lux (F/1.6)	0.01 Lux (F/1.6)
<b>Day &amp; Night</b>	ICR	
<b>Gamma</b>	γ=0.45 typ	
<b>White Balance</b>	ATW, PUSH, AWC, 3,200°K, 5,600°K, Manual(R,B)	
<b>Protocol</b>	PELCO-D&P	
<b>Focal length</b>	3.9mm ~ 85.8mm/F1.6(W)~F3.7(T)	
<b>Zoom</b>	Optical:22X, Digital 12X(264X)	
<b>OSD Menu</b>	YES	
<b>Shutter Speed</b>	AUTO:1/60(1/50)~1/100,000sec Manual:1/60(1/50),FLK(1/120),1/250,1/500,1/1,000,1/2,000,1/4,000,1/10,000	
<b>Power Supply</b>	Regulated 12V DC ± 10%	
<b>Current Consumption</b>	Max.400mA(at 12V DC)	
<b>Operation Temp.</b>	-10°C ~ 50°C	
<b>Preservation Temp.</b>	-20°C ~ 60°C	
<b>Dimension</b>	63.6(W)x75.2(H)x101.1(D)mm	

Authorized Distributor: