

Goldeye®

Your last stop for CCTV solution



Miniature Camera

GEMC560 - Resolution: 500TV-Line


- 1/3" COLOR SONY SUPER HAD CCD
- Min. Illumination: 0.5 Lux
- Miniature Size
- Board, pinhole, cone pinhole lens available
- Audio available (Option)



Made in Korea

CE FC

Your last stop for CCTV solution

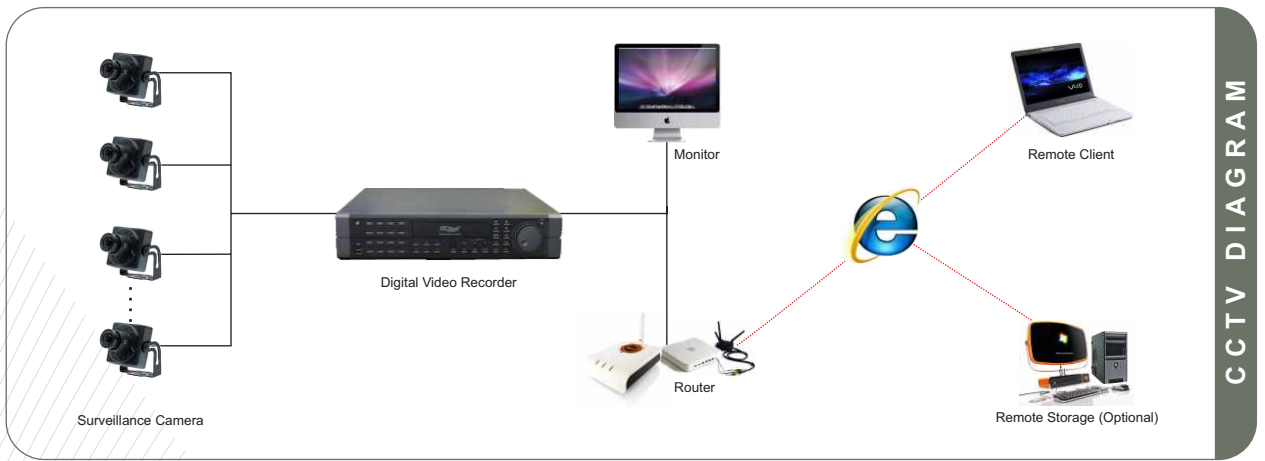

CCTV DIAGRAM

SPECIFICATIONS

| | |
|----------------------------|--|
| Model | GEMC560 |
| Image Sensor | 1/3" COLOR SONY SUPER HAD CCD |
| Pixel | 410K |
| Scanning System | 2:1 Interlace |
| Sync. Type | Internal |
| Resolution | 500TV-LINE |
| S/N Ratio | 45dB(AGC OFF) |
| Video Output | 1.0Vp-p (Sync.Negative) Termination 75Ω ± 10% |
| Min. Illumination | 0.5 Lux(F/2.0) |
| Lens | Fixed focal board lens |
| Gamma | $\gamma=0.45$ typ.(0.45, 0.6, 1.0, user) |
| Shutter Speed | 1/60(1/50)~1/100,000sec |
| Power Supply | Regulated 12V DC ± 10% |
| Current Consumption | Max.140mA (at DC12V) W/O Audio Max.150mA (at DC12V) W Audio |
| Operation Temp. | -10°C ~ 50°C |
| Preservation Temp. | -20°C ~ 60°C |
| Dimension | 31.8(W)X31.8(H)X29.6(D)mm |
| Weight | Approx. 50g |

Authorized Distributor:

GoldEye®

w w w . g o l d e y e c c t v . c o m